COMPENSATOR 0,25 LITER

FULL OCEAN DEPTH KYSTDESIGN



Description

The 0,25L compensator is a lightweighted, small, and proven compensator. It is mainly used to maintain a raised pressure in a fluid circuit related to ambient at all water depths.

Compensator can be used at full ocean depth. Oil level can be visually read through slots in the spring housing.

Features

- Solid and Reliable Design
- Full Ocean Depth
- Spring Loaded



• The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, post@envirent.no

Specifications

0,25L Compensator


General Technical Specifications

Type Capacity Dimensions L x W x H Weight in air Depth Rate Pressure Hydraulic Connection

0,25 L Compensator 0,25 Liter 85 x 85 x 187 mm 0,93 kg Full Ocean Depth 0,25 – 0,60 Bar 2x 1/4" BSPP

Mechanical Interface

Fastening to external structure by using any of the bolt holes, or by clamps around the cylindrical part. Clams can be supplied on request.

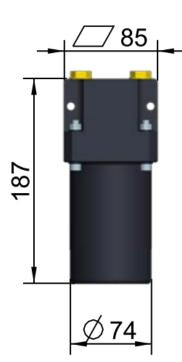

J1W C envirent

The specification details are illustrative for marketing purpose only. Actual equipment may be different as a result of product improvement or other reasons. Specific interface and performance information should be reconfirmed at time of order placement. Envirent AS, Robotvegen 16, 4340 Bryne, +47 477 77 500, post@envirent.no