
DIRTY WORK PACK

GEN-1 ISOLATED HYDRAULIC POWERPACK

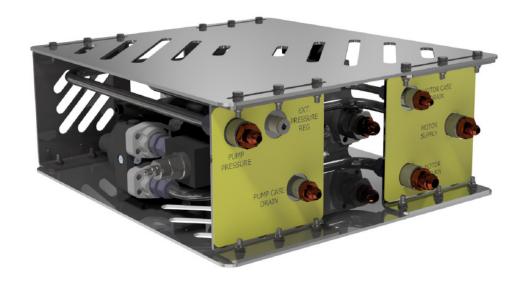

Description

This Dirty Work Pack is an Isolated Hydraulic Power Unit (IHPU) that can be easily incorporated into a ROV hydraulic system to provide an isolated hydraulic supply for driving tooling and equipment that may potentially otherwise cause contamination to the main ROV hydralic supply.

The unit is a fully self-contained circuit incorporating hydraulic motor, pressure compensated pump, compensated bellhousing, pressure and return line and multiple inlet/outlet connection points. Hook-up to the ROV is quick and simple by connecting a supply, return and drain line to a ROV valve pack function.

Can also be delivered with compensated reservoir and electric/hydraulic operated directional valve as option.

Features

- 207 / 345 Bar pump supply
- 45 L/min pump flow
- Integrated flow control valve
- Mineral oil or water based fluid
- Rated to 3000 MSW
- Bulkhead connection
- Steel protection cover



SPECIFICATIONS ISOLATED HYDRAULIC POWER UNIT

General Technical Specifications

Type Isolated Hydraulic Power Unit

Part Number 103319

Dimensions mm 550 x 244 x 600

Weight (in air / submerged) kg ~41 / ~32

Hydraulic

Max. Input Pressure Bar 207

Max. Output Pressure Bar 207 or 345

Max. Input Flow L/min 90
Max. Output Flow L/min 45

Fluid Compatibility**

Output Mineral oil, Control Fluid and Water based glycol

Connection ROV pressure JIC #8

Connection ROV return JIC #12

Connection ROV drain JIC #6

Connection DWP Supply JIC #8

Connection DWP Case Drain JIC #6

Connection DWP Suction JIC SAE 1-1/4" Flange Connection DWP Ext. Regulator JIC #6 (OPTIONAL)

General Features

Depth rating MSW 3000





^{**} Please contact us for more information regarding fluid compatibility.